

General Catalogue

15

the draught stopper



Comaglio

SOTTO LE TUE PORTE NON PASSERÀ NULLA.



INDEX

COMAGLIO: DRAUGHT EXCLUDERS SINCE 1976.

Our company was founded in 1976 bringing draught excluders to Italy. Thirty years after that first historical patent and thanks to the experience of three generations, Comaglio continues its family business, but its products are now of international fame. From the garage workshop where Aldo Comaglio created the first Italian prototype draught excluder, up to our modern premises of today, close to Lake Garda, craftsmanship and passion for the job have always fired our activities.

History	p. 3
Reading guide	p. 4
Certifications	p. 5
 OUR SERIES	 p. 6
Pressure SERIES	p. 8
Cheap SERIES	p. 10
Special SERIES	p. 12
No Sound SERIES	p. 14
Comax SERIES	p. 16
Universal SERIES	p. 18
 Accessories, showcases and samples	 p. 19

The first patent foresaw only two applications serving also as a drip, then evolution became the basis for Comaglio's creative engineering process. And so it was that in the early 1980s Comaglio, with a small staff, opened a factory in Gavardo (BS).

After the opening of an Italian market showing interest for this innovative product, the Comaglio draught excluder faced the international scenario at the start of the 90s. Business has grown in terms of staff, investments, technology and

solutions, customer care and satisfaction being still our main objective. For this reason, in 2002 we extended our premises in Muscoline (BS).

Our quest is to identify solutions with the greatest care for details, using innovative and flexible production lines for our offer to a market in continuous evolution.

Today in more than 20 countries throughout the world, Comaglio is a synonym for quality, precision and technology.

HOW TO CHOOSE A DRAUGHT EXCLUDER.

Comaglio's mission is to provide a solution to every customer's need. In this brief introduction, we wish to provide a key to your choice of the solution that meets your needs.

1

WHICH KIND OF DOOR?

The draught excluder can be mounted in all types of doors: wood, aluminium, PVC, steel and armoured. The material of which the door is composed is the fundamental factor in choosing the draught excluder. Different types of door require different types of draught excluder due to their differing dimensions and types of fixings.

2

WHICH MECHANISM?

The mechanism is the draught excluder motor. Two solutions are available:

DOUBLE ADJUSTMENT

The double adjustment mechanism, exclusively patented by our company, allows the regulation of both the descent and inclination of the mobile profile. Although being removable as usual, the mechanism guarantees a decisive and homogeneous pressure along the whole length of the draught excluder.

OSCILLATING

The oscillating mechanism is technically more simple than the double adjustment but offers excellent performance in the hold, duration and control of profile movement with a lining that acts thanks to the combined function of two rigid levers.

3

CHECK THE SECTION.

Checking the necessary section is often the first step in choosing the right draught excluder. Both the height and the breadth of the draught excluder are fundamental indications for use of our products. Especially in particular applications such as internal doors, or doors in aluminium or PVC.

4

WHICH SEAL?

The choice of the most suitable seal is an ideal complement in maximising the performance of the draught excluder. The choice of seal design and materials is important not only for the floor contact of the mobile profile, but is also obligatory when the doors have to be certified.

5

WHICH FASTENING?


Various fastening systems are available: from the traditional type that can be removed, to time-saving pre-mounted screws, to wings for particular solutions.

All systems are extremely functional and long-lasting. One's choice means to decide immediately which is the main need in terms of practicality and easy assembly, based on the type of door on which the draught excluder has to be mounted.

6

WHICH PUSH BUTTON?

The form and material of the push button are not only a question of aesthetics but - acting in combination with the rabbet - they optimise the function of the draught excluder without damaging the frame.



CERTIFICATION. CERTIFICATION OF COMAGLIO PRODUCTS.

Continuous investments in research and development are guaranteed by a certification process to provide customers with an answer that not only complies with market needs, but also legal standards, in order to obtain products respecting European directives. In this respect Comaglio products have been certified for the resistance of the frame to noise, fire and wear.



NOISE ABATEMENT

The reduction of external noise is one of the main features of a good door. To improve this characteristic it is fundamental to optimise the closing of the gap between door and floor. Thus the draught excluder represents an essential and necessary element in obtaining good results. In compliance with the standards UNI EN ISO 140, UNI EN ISO 717 and DIN 52 210, all our products have been certified with excellent results at Istituto Giordano and the IFT Institute of Rosenheim.

We have grouped all the draught excluders obtaining the best noise abatement results in our No Sound Series, but we are able to provide objective assessments for all other products on request. Given the importance of noise abatement certification in our sector, we have considered it important to verify the efficiency in this ambit of draught excluders belonging to the other series so we are able to provide customers with other useful elements of assessment.



AIR SEAL

The standards EN 1026, EN 1027 and EN 14351 impose the CE mark on all pedestrian entry doors in the European Community which must therefore necessarily comply with certain safety requirements and various quality standards.



FIRE RESISTANCE

The resistance of a door and draught excluder to fire and propagation of the same is contemplated by various directives. For this reason Comaglio draught excluders can be provided with linings that comply with the UL 94 standard, making them suitable for application on fire barrier doors.



LIFE CYCLE

The function of Comaglio draught excluders is guaranteed to be long-lasting. This is supported by the certification issued by Istituto Giordano which submitted catalogue items to 200,000 complete opening-closing movements of the door without finding any limitation of functions or other signs of wear and tear at the end of the test.

PRESSURE SERIES

1700 1770 MINI
1712 1800
1700 MINI 1813
1770 1830
1772

Available for doors:

- > PVC
- > ARMoured
- > WOOD
- > ALUMINIUM

CHEAP SERIES

420 470 MINI
422 520
420 MINI 540
470 475
472

Available for doors:

- > PVC
- > ARMoured
- > WOOD
- > ALUMINIUM

SPECIAL SERIES

AE 170/12
110 170/15
920 270
120 1370

Available for doors:

- > PVC
- > ARMoured
- > WOOD
- > ALUMINIUM
- > STEEL

NO SOUND SERIES

ISOLA 1773 ACU
I-2015NS 1770 ACU
1370NS 1430NS
1770XNS 1800XNS
1770NS

Available for doors:

- > ARMoured
- > WOOD
- > ALUMINIUM
- > STEEL

COMAX SERIES

1750 1050
1450 125SP
1760GD 126SP
1255 1151
1250

Available for doors:

- > PVC
- > ARMoured
- > WOOD
- > ALUMINIUM
- > STEEL
- > GLASS

UNIVERSAL SERIES

1375
1380
1350
1355
1360

Available for doors:

- > PVC
- > ARMoured
- > WOOD
- > ALUMINIUM

The **PRESSURE SERIES** is characterised by the Comaglio twin adjusting mechanism; It is a patented mechanism designed to perfectly close the gap between doors and floors. The downward pressure applied by the seal to the floor is equal across the full width of the door. This is essential for optimal sealing in normal conditions and particularly important in more difficult situations such as uneven floors, tiling etc...

The **CHEAP SERIES** offers a new third generation tilting mechanism. It works by branching off the double adjusting mechanism of the Pressure Series, since it moves the active function of the floor closing springs (which are limited now to a passive return function to 2 stiff levers that guarantee complete control of the moving profile and a controlled and even pressure to the floor.

The **SPECIAL SERIES** is designed for fixing to aluminium frames, where the small size of the seal is of major importance. It is therefore possible to find within this range, a number of products well adapted to most aluminium applications. The item ref AE, new in 2006, has been added to comply with new European regulations whilst guaranteeing a speedy installation and a perfect seal to the floor.

All **NO SOUND SERIES** have successfully passed acoustic testing in a recognised European test laboratory. The Comaglio mechanism with double adjustment, silicone hardware and reinforced profiles guarantees a perfect floor seal and therefore perfect sound insulation. It is possible to fit the this series with a silicon seal which is self-extinguishing and certified for use with on fire doors.

The **COMAX SERIES** is designed by Comaglio for the DIY market. This series offers the perfect combination: guaranteed functionality using Comaglio patented mechanisms and detailed attractive design thanks to a removable seal in black metallic finish with a cover plate and matching end-caps available in 7 finishes. Accessories and complete reversibility make this Comax range applicable to all types of doors. For more economical use, Comaglio suggests the item 1250 in brushed or paint finished aluminium and the new item 1050, screwed on or dual adhesive in coloured PVC.

The **UNIVERSAL SERIES** complete the range. Recent laws impose precise quality standards for doors, among which a certain air and water seal. The items in this series offer simple solutions, alternative to "classical" excluders and guarantee excellent results in thermal and acoustic insulation.

PRESSURE SERIES


> 1700 > 1712 > 1700 MINI > 1770 > 1772 > 1770 MINI > 1800 > 1813 > 1830

TRADITIONAL FASTENING BY MOVING INTERNAL PROFILE

1700



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 40 pieces


COMPONENTS	
	Brass hexagonal push button
	EPDM seal
OPTIONS	
	Round nylon push button
	Black brush 48x1100
	Self-extinguishing silicon seal
	Front brackets in stainless steel

Acoustic insulation up to 35 dB, certified @
Giordano Institute - test report n. 218979

1712



> ARMoured
> WOOD
> PVC



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 40 pieces


COMPONENTS	
	Brass hexagonal push button
	EPDM seal
	"U" 12 mm. fixed profile
OPTIONS	
	Round nylon push button
	Black brush 48x1100
	Self-extinguishing silicon seal
	30 mm. high fixed profile
	Front brackets in stainless steel

Acoustic insulation up to 42 dB, certified @
IFT - test report n. 13 - 002395 - PRO2

1700
MINI



> ALUMINIUM
> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 50 pieces

COMPONENTS	
	Brass hexagonal push button
	EPDM seal with 4 pressure points
OPTIONS	
	Round nylon push button
	Black brush 48x1100
	Front brackets in stainless steel


Acoustic insulation up to 43 dB, certified @
IFT - test report n. 13 - 002395 - PRO2

FASTENING BY PRE-FITTED SCREWS

1770



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 40 pieces


COMPONENTS	
	Brass hexagonal push button
	EPDM seal
OPTIONS	
	Round nylon push button
	Self-extinguishing silicon seal
	Self-threading screws for wood

Acoustic insulation up to 35 dB, certified @
Giordano Institute - test report n. 218979

1772



> ARMoured
> WOOD
> PVC



STANDARD SIZES:
cm. 53-63-73-83- 93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 40 pieces

COMPONENTS	
	Brass hexagonal push button
	EPDM seal
	"U" 12 mm. fixed profile


OPTIONS	
	Round nylon push button
	Black brush 48x1100
	Self-extinguishing silicon seal
	30 mm. high fixed profile
	Self-threading screws for wood

Acoustic insulation up to 42 dB, certified @
IFT - test report n. 13 - 002395 - PRO2

1770
MINI



> ALUMINIUM
> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83- 93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 50 pieces

COMPONENTS	
	Brass hexagonal push button
	EPDM seal with 4 pressure points

OPTIONS	
	Round nylon push button
	Black brush 48x1100
	Self-threading screws for wood


Acoustic insulation up to 43 dB, certified @
IFT - test report n. 13 - 002395 - PRO2

FASTENING BY WINGS

1800



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83- 93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 32 pieces

COMPONENTS	
	Brass hexagonal push button
	EPDM seal

OPTIONS	
	Round nylon push button
	Black brush 48x1100
	Self-extinguishing silicon seal
	Intumescent adhesive strips for wings


PVC VERSION	
	12 mm. "Omega" fixed profile (art. 1812)

Acoustic insulation up to 35 dB, certified @
Giordano Institute - test report n. 218979

1813



> PVC



STANDARD SIZES:
cm. 53-63-73-83- 93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 32 pieces

COMPONENTS	
	Brass hexagonal push button
	EPDM seal


OPTIONS	
	Round nylon push button
	Black brush 48x1100
	Self-extinguishing silicon seal

Acoustic insulation up to 42 dB, certified @
IFT - test report n. 13 - 002395 - PRO2

1830



> ARMoured



STANDARD SIZES:
cm. 53-63-73-83- 93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 32 pieces

COMPONENTS	
	Brass hexagonal push button
	EPDM seal

OPTIONS	
	Round nylon push button
	Black brush 48x1100
	Self-extinguishing silicon seal

Acoustic insulation up to 35 dB, certified @
Giordano Institute - test report n. 218979

CHEAP SERIES


> 420 > 422 > 420 MINI > 470 > 472 > 470 MINI > 520 > 540 > 475

TRADITIONAL FASTENING BY MOVING INTERNAL PROFILE

420

B

> ARMoured
> WOOD



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 40 pieces


COMPONENTS	
	Round nylon push button
	EPDM seal
OPTIONS	
	Brass hexagonal push button
	Black brush 48x1100
	Self-extinguishing silicon seal
	Front brackets in stainless steel

Acoustic insulation up to 34 dB, certified @ Giordano Institute - test report n. 218979

422

B

> ARMoured
> WOOD
> PVC



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 40 pieces


COMPONENTS	
	Round nylon push button
	EPDM seal
	"U" 12 mm. fixed profile
OPTIONS	
	Brass hexagonal push button
	Black brush 48x1100
	Self-extinguishing silicon seal
	30 mm. high fixed profile
	Front brackets in stainless steel

Acoustic insulation up to 43 dB, certified @ Giordano Institute - test report n. 294098

420
MINI

B

> ALUMINIUM
> ARMoured
> WOOD



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 50 pieces

COMPONENTS	
	Round nylon push button
	EPDM seal with 4 pressure points
OPTIONS	
	Brass hexagonal push button
	Black brush 48x600
	Front brackets in stainless steel


Acoustic insulation up to 38 dB, certified @ Giordano Institute - test report n. 262912

FASTENING BY PRE-FITTED SCREWS

470

B

> ARMoured
> WOOD



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 40 pieces


COMPONENTS	
	Round nylon push button
	EPDM seal
OPTIONS	
	Brass hexagonal push button
	Self-extinguishing silicon seal
	Self-threading screws for wood

Acoustic insulation up to 34 dB, certified @ Giordano Institute - test report n. 218979

472

B

> ARMoured
> WOOD
> PVC



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 40 pieces


COMPONENTS	
	Round nylon push button
	EPDM seal
	"U" 12 mm. fixed profile
OPTIONS	
	Brass hexagonal push button
	Black brush 48x1100
	Self-extinguishing silicon seal
	30 mm. high fixed profile
	Self-threading screws for wood

Acoustic insulation up to 43 dB, certified @ Giordano Institute - test report n. 294098

470
MINI

B

> ALUMINIUM
> ARMoured
> WOOD



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 50 pieces

COMPONENTS	
	Round nylon push button
	EPDM seal with 4 pressure points
OPTIONS	
	Brass hexagonal push button
	Self-threading screws for wood


Acoustic insulation up to 38 dB, certified @ Giordano Institute - test report n. 262912

FASTENING BY WINGS

520

B

> ARMoured
> WOOD



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 32 pieces


COMPONENTS	
	Round nylon push button
	EPDM seal
OPTIONS	
	Round nylon push button
	Black brush 48x1100
	Self-extinguishing silicon seal
	Intumescent adhesive strips for wings
PVC VERSION	
	12 mm. "Omega" fixed profile (art. 512)

Acoustic insulation up to 34 dB, certified @ Giordano Institute - test report n. 218979

540

B

> ARMoured



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 32 pieces

COMPONENTS	
	Round nylon push button
	EPDM seal
OPTIONS	
	Brass hexagonal push button
	Black brush 48x1100
	Self-extinguishing silicon seal


Acoustic insulation up to 34 dB, certified @ Giordano Institute - test report n. 218979

LATERAL FASTENING

475

B

> ARMoured



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 40 pieces

COMPONENTS	
	Round nylon push button
	EPDM seal
OPTIONS	
	Brass hexagonal push button
	Black brush 48x1100
	Self-extinguishing silicon seal

Acoustic insulation up to 34 dB, certified @ Giordano Institute - test report n. 218979


SPECIAL SERIES

> AE > 110 > 920 > 120 > 170/12 > 170/15 > 270 > 1370

AE

DR

> ALUMINIUM



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 30 pieces


COMPONENTS	
<input checked="" type="checkbox"/>	Brass hexagonal push button
<input checked="" type="checkbox"/>	Double self-extinguishing silicon seal
OPTIONS	
<input type="checkbox"/>	Round nylon push button
<input type="checkbox"/>	Self-extinguish wrapped silicon seal

Acoustic insulation up to 46 dB, certified @ Giordano Institute - test report n. 294098

FASTENING INSIDE EUROPEAN GROOVE

110

> ALUMINIUM





STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 15
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 60 pieces

COMPONENTS	
<input checked="" type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	Black brush 48x1100
OPTIONS	
<input checked="" type="checkbox"/>	EPDM seal

920

B

> WOOD

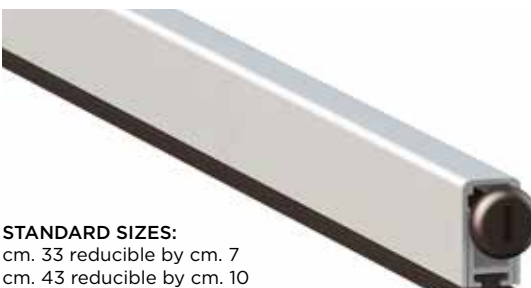

STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 10
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 50 pieces

COMPONENTS	
<input checked="" type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	EPDM seal with 4 pressure points
OPTIONS	
<input type="checkbox"/>	Brass hexagonal push button
<input type="checkbox"/>	Black brush 48x600
PRE-FITTED SCREWS VERSION	
<input checked="" type="checkbox"/>	Self-threading screws for wood (art.970)


Acoustic insulation up to 37 dB, certified @ Giordano Institute - test report n. 65352

FASTENING BY PRE-FITTED SCREWS

120

B

> ALUMINIUM




STANDARD SIZES:
cm. 33 reducible by cm. 8
cm. 43 reducible by cm. 12
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 32 pieces

COMPONENTS	
<input checked="" type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	Double EPDM seal
<input checked="" type="checkbox"/>	Double possible position of seal
OPTIONS	
<input type="checkbox"/>	Brass round push button

170/12

B

> ALUMINIUM



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43-53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 30 pieces


COMPONENTS	
<input checked="" type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	Self-extinguishing silicon seal
OPTIONS	
<input type="checkbox"/>	Brass hexagonal push button

Acoustic insulation up to 47 dB, certified @ Giordano Institute - test report n. 294098

170/15

B

> STEEL
> ALUMINIUM



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43-53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 30 pieces


COMPONENTS	
<input checked="" type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	Self-extinguishing silicon seal
OPTIONS	
<input type="checkbox"/>	Brass hexagonal push button

Acoustic insulation up to 45 dB, certified @ Giordano Institute - test report n. 294098

270

B

> ALUMINIUM
> PVC




STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 30 pieces

COMPONENTS	
<input checked="" type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	2 neoprene seals
OPTIONS	
<input type="checkbox"/>	Brass hexagonal push button

1370

DR

> ALUMINIUM
> PVC



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 30 pieces

COMPONENTS	
<input type="checkbox"/>	Brass hexagonal push button
<input checked="" type="checkbox"/>	2 neoprene seals
OPTIONS	
<input type="checkbox"/>	Round nylon push button


NO SOUND SERIES

> ISOLA > I-2015NS > 1370NS > 1770XNS > 1770NS > 1773ACU > 1770ACU > 1430NS > 1800XNS

ISOLA



> WOOD



STANDARD SIZES:
cm. 43 reducible by cm. 12
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 24 pieces

COMPONENTS	
	Brass hexagonal push button
	3 silicon seals
OPTIONS	
	Self-extinguishing silicon seal


Acoustic insulation up to 45 dB, certified @ IFT - test report n.167 18460

TRADITIONAL FASTENING BY MOVING INTERNAL PROFILE

1770 NS



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 28 pieces


COMPONENTS	
	Brass hexagonal push button
	Self-extinguishing silicon seal
OPTIONS	
	Round nylon push button
	Self-threading screws for wood
VARIANT	
	"Omega" fixed profile (art.1800 NS)

Acoustic insulation up to 47 dB, certified @ IFT - test report n.167 19336/1

1773 ACU



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 28 pieces


COMPONENTS	
	Brass hexagonal push button
	Self-extinguishing silicon seal
OPTIONS	
	Round nylon push button
	Self-threading screws for wood

Acoustic insulation up to 50 dB, certified @ IFT - test report n. 13 - 002395 - PR02

I-2015 NS



> STEEL
> ALUMINIUM
> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 24 pieces

COMPONENTS	
	Brass hexagonal push button
	Self-extinguish wrapped silicon seal
OPTIONS	
	Round nylon push button


Acoustic insulation up to 45 dB, certified @ IFT - test report n.167 18460

FASTENING BY PRE-FITTED SCREWS

1770 ACU



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 40 pieces


COMPONENTS	
	Brass hexagonal push button
	Self-extinguishing silicon seal
OPTIONS	
	Round nylon push button
	Self-threading screws for wood

Acoustic insulation up to 39 dB, certified @ Giordano Institute - test report n. 262912

1370 NS



> STEEL
> ALUMINIUM
> ARMoured



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 25 pieces

COMPONENTS	
	Brass hexagonal push button
	Self-extinguish wrapped silicon seal
OPTIONS	
	Round nylon push button
	Front brackets in stainless steel


Acoustic insulation up to 57 dB, certified @ IFT - test report n. 13 - 002395 - PR02

FASTENING BY WINGS

1430 NS



> STEEL
> ARMoured



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 28 pieces


COMPONENTS	
	Brass hexagonal push button
	Self-extinguishing silicon seal
OPTIONS	
	Round nylon push button
	Self-threading screws for wood

Acoustic insulation up to 57 dB, certified @ IFT - test report n. 13 - 002395 - PR02

1770 XNS



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 28 pieces


COMPONENTS	
	Brass hexagonal push button
	Self-extinguish wrapped silicon seal
OPTIONS	
	Round nylon push button
	Self-threading screws for wood
	Intumescent adhesive strips

Acoustic insulation up to 54 dB, certified @ IFT - test report n. 13 - 002395 - PR02

1800 XNS



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 28 pieces

COMPONENTS	
	Brass hexagonal push button
	Self-extinguishing silicon seal
OPTIONS	
	Round nylon push button
	Intumescent adhesive strips for wings

Acoustic insulation up to 54 dB, certified @ IFT - test report n. 13 - 002395 - PR02


COMAX SERIES

> 1750 > 1450 > 1760GD > 1255 > 1250 > 1050 > 125SP > 126SP > 1151

1750



> DO IT
YOURSELF




STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 10 pieces

COMPONENTS	
	Semi-circular push button
	EPDM seal
OPTIONS	
	Black brush 48x1100
AVAILABLE FINISHES	
Profile and matching end-caps available in 6 finishes: anodized bronze, silver and black electroplate, white Painted RAL 1013, white RAL 9010, brown RAL 8017	
	Acoustic insulation up to 39 dB, certified @ IFT - test report n. 13 - 002395 - PRO2

1450



> DO IT
YOURSELF




STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 20
STANDARD PACKAGING: 10 pieces

COMPONENTS	
	Semi-circular push button
	EPDM seal
AVAILABLE FINISHES	
Profile and matching end-caps available in 6 finishes: anodized bronze, silver and black electroplate, white Painted RAL 1013, white RAL 9010, brown RAL 8017	

1760
GD



> GLASS




STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 10 pieces

COMPONENTS	
	Semi-circular push button
	EPDM seal
OPTIONS	
	Black brush 48x1100
AVAILABLE FINISHES	
Anodized silver	
	Acoustic insulation up to 39 dB, certified @ IFT - test report n. 13 - 002395 - PRO2

1255

> DO IT
YOURSELF




STANDARD SIZES:
cm. 80-100-120
STANDARD PACKAGING: 15 pieces

COMPONENTS	
	Black brush 48x1100
OPTIONS	
	EPDM seal
AVAILABLE FINISHES	
Profile and matching end-caps available in 6 finishes: anodized bronze, silver and black electroplate, white Painted RAL 1013, white RAL 9010, brown RAL 8017	

1250

> DO IT
YOURSELF





STANDARD SIZES:
cm. 80-100-120
STANDARD PACKAGING: 15 pieces

COMPONENTS	
	Black brush 48x1100
OPTIONS	
	EPDM seal
AVAILABLE FINISHES	
Profile available in 6 finishes: anodized bronze, silver and black electro-plate, white Painted RAL 1013, white RAL 9010, brown RAL 8017	

1050

> DO IT
YOURSELF

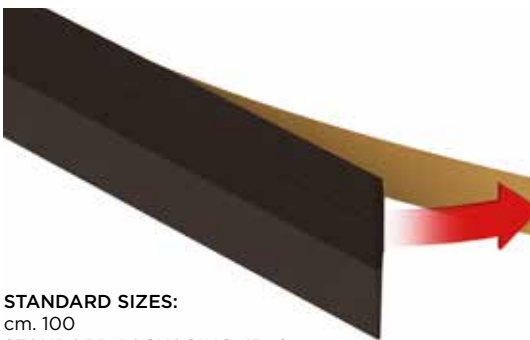



STANDARD SIZES:
cm. 100
STANDARD PACKAGING: 15 pieces

COMPONENTS	
Fastening by adhesive	
AVAILABLE FINISHES	
White and brown	

125SP

> DO IT
YOURSELF

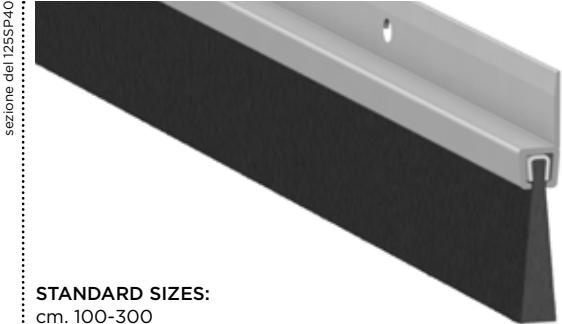



STANDARD SIZES:
cm. 100-300
STANDARD PACKAGING: 10 pieces

BRUSH SIZE	
mm. 30 (125SP30)	
mm. 40 (125SP40)	
mm. 50 (125SP50)	
mm. 60 (125SP60)	

126SP

> DO IT
YOURSELF

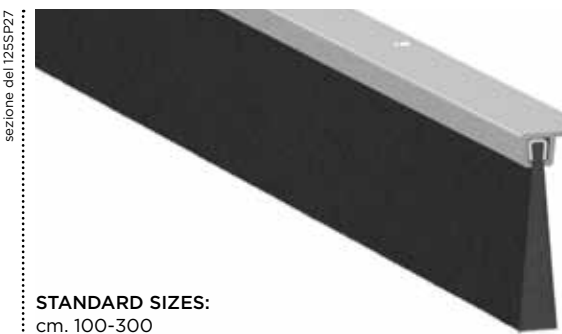

STANDARD SIZES:
cm. 100-300
STANDARD PACKAGING: 10 pieces


BRUSH SIZE	
mm. 17 (126SP17)	
mm. 27 (126SP27)	
mm. 37 (126SP37)	

FIXED DRAUGHT EXCLUDER

FIXED DRAUGHT EXCLUDER FOR ROLLING SHUTTER

1255

> DO IT
YOURSELF




STANDARD SIZES:
cm. 80-100-120
STANDARD PACKAGING: 15 pieces

COMPONENTS	
	Black brush 48x1100
OPTIONS	
	EPDM seal
AVAILABLE FINISHES	
Profile and matching end-caps available in 6 finishes: anodized bronze, silver and black electroplate, white Painted RAL 1013, white RAL 9010, brown RAL 8017	

1151

> DO IT
YOURSELF





STANDARD SIZES:
cm. 80-100-120-140-160-180-200-220-240
STANDARD PACKAGING: 10 pieces

COMPONENTS	
	Black brush 48x900
	Black brush 48x1600
AVAILABLE FINISHES	
Profile and matching end-caps available in 6 finishes: anodized bronze, silver and black electroplate, white Painted RAL 1013, white RAL 9010, brown RAL 8017	

UNIVERSAL SERIE

> 1375 > 1380 > 1350 > 1355 > 1360

1360

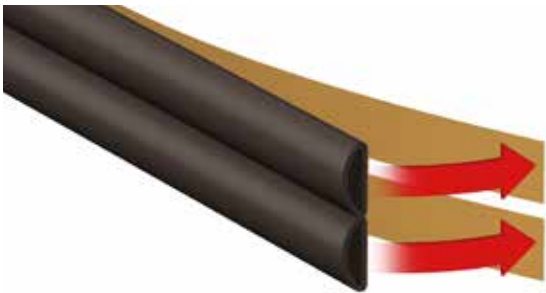


COMPONENTS
EPDM seal with adhesive

STANDARD PACKAGING: 6 mt.

SILLS


1375

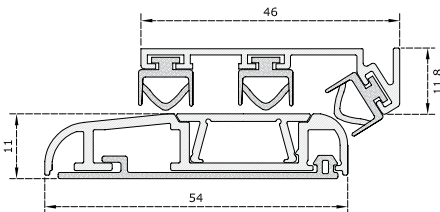


STANDARD SIZES:
cm. 43-53-63-73-83-93-103-113-123-133
STANDARD PACKAGING: 15 pieces

COMPONENTS
Silver anodised aluminium sill with a floor seal and hidden fastening
Silver anodised profile for door with 3 EPDM seal
2 head plates
OPTIONS
Special big section of seal for profile for door

ACCESSORIES

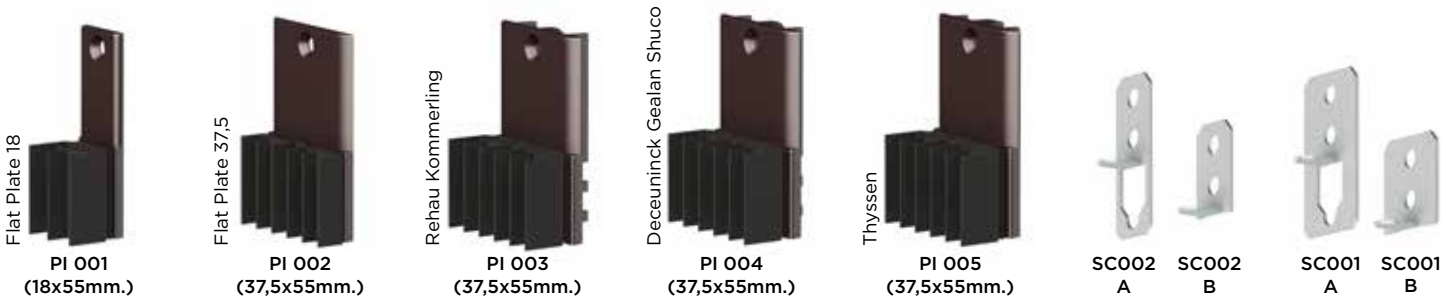

1380



STANDARD SIZES:
cm. 43-53-63-73-83-93-103-113-123-133
STANDARD PACKAGING: 15 pieces

COMPONENTS
Aluminium sill to be combined with a draught excluder

SHOWCASES AND SAMPLE




• Counter samples in WOOD, ALUMINIUM and PVC, useful for showing the functions, characteristics and fastening systems of all our draught excluders.



FIXED DRAUGHT EXCLUDER

1350




STANDARD SIZES:
cm. 80-100-120
STANDARD PACKAGING: 15 pieces

COMPONENTS
Alluminium raw profile
EPDM seal

ADHESIVE SEALS

1355



STANDARD PACKAGING: 6 mt.

COMPONENTS
EPDM seal with adhesive

- Metal display 50 cm. wide with 6 hooks (10 items per hook when fully loaded)
- Metal display 100 cm. wide with 12 hooks (10 items per hook when fully loaded)



COMAGLIO Srl
Via Industriale, 4/b
25080 Muscoline (Bs) - Italy
Tel. +39 0365 373790
Fax +39 0365 371811
info@comaglio.it

WWW.COMAGLIO.IT
