


# KUBICA K5080

A new invisible hinge:



- 5 rotation pivots
- 80 kg capacity

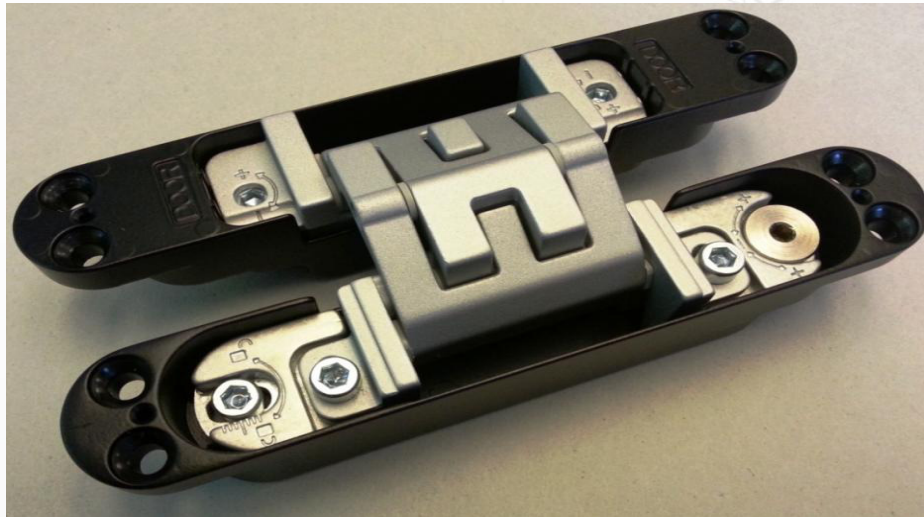

# K5080 – technical specifications

*Material:* Zama

*Available finishing:* satin chrome, satin nickel

*Tested for doors:* 600/900 x 2100 mm


*Min panel thickness:* **40 mm**

*Version:* reversible



*Capacity:* **80 kg** with 2 hinges

*Accessories:* fixing plate for wooden jamb

# K5080 – technical specifications

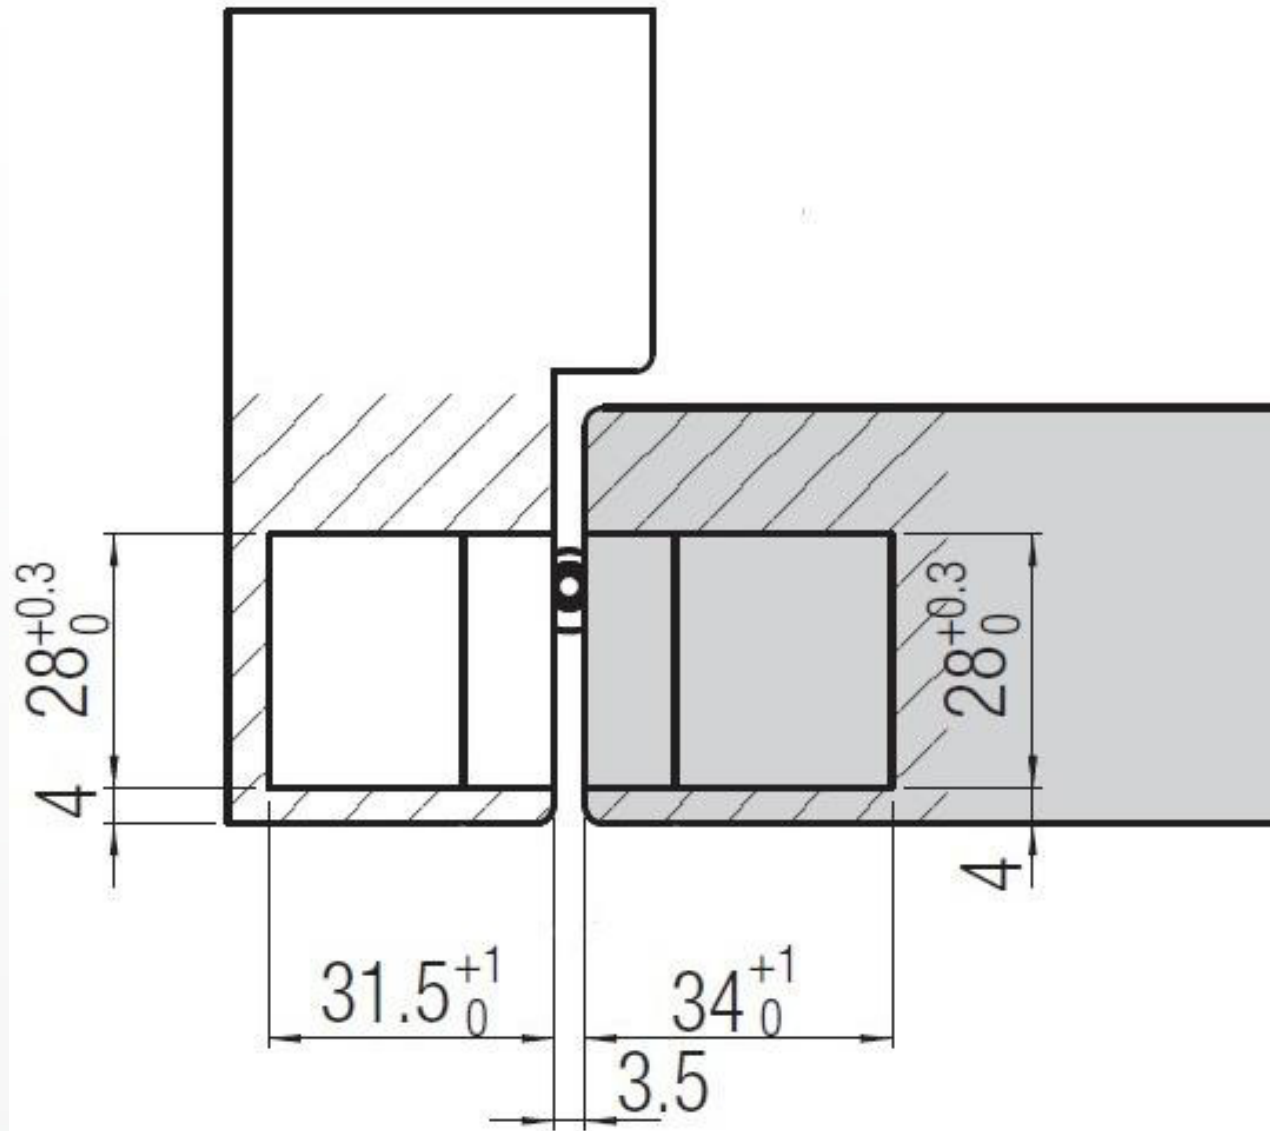

# K5080 – technical specifications

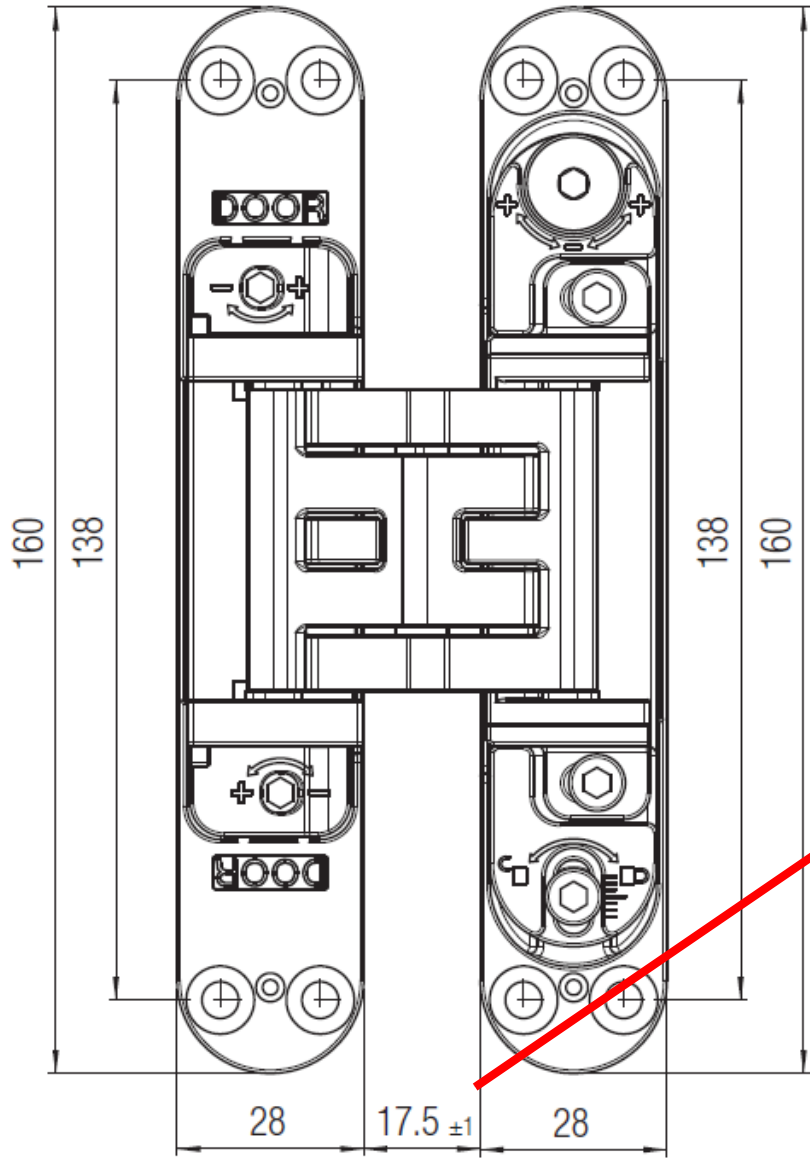

9,5 mm

Greater gap of 2 mm compared to K7080 = 7,3 mm

- K2700 = 13,75 mm
- K3000 = 16,8 mm
- K6300 = 17,5 mm

# K5080 – technical specifications

More gap of 2,2 mm helps to avoid the contact between door and jamb.

This situation is mainly possible when only 2 hinges are installed.

Suitable for rough edges (if spoking is not applied)







# K5080 – adjustment


Allen key no.4

KRONA KOBLENZ

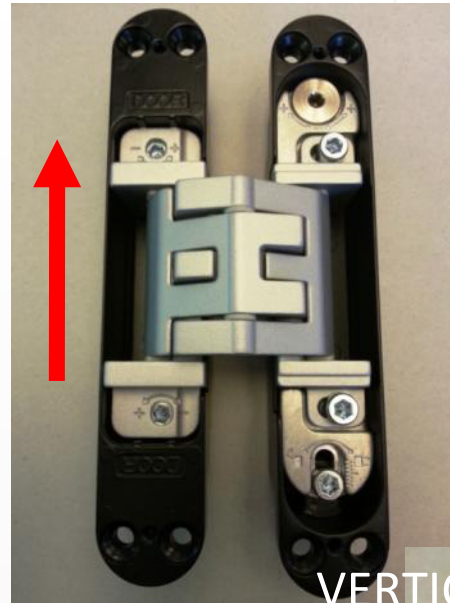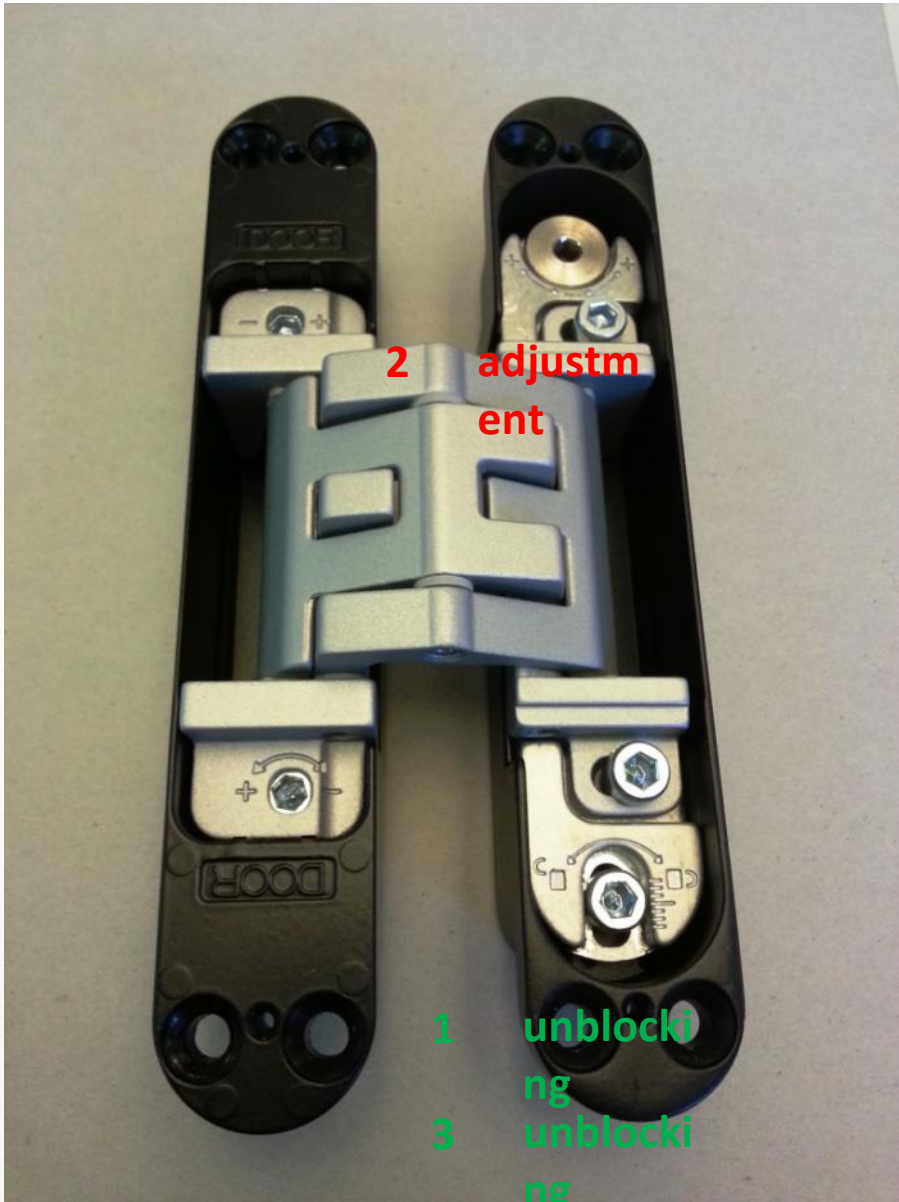

VERTICAL

±3mm

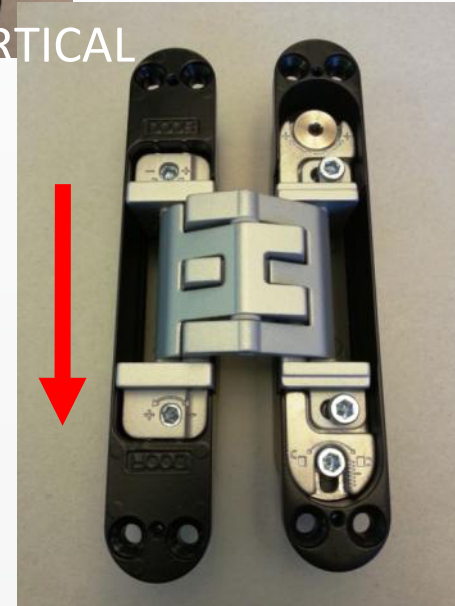





# K5080 – adjustment

Allen key no.4

KRONA KOBLENZ

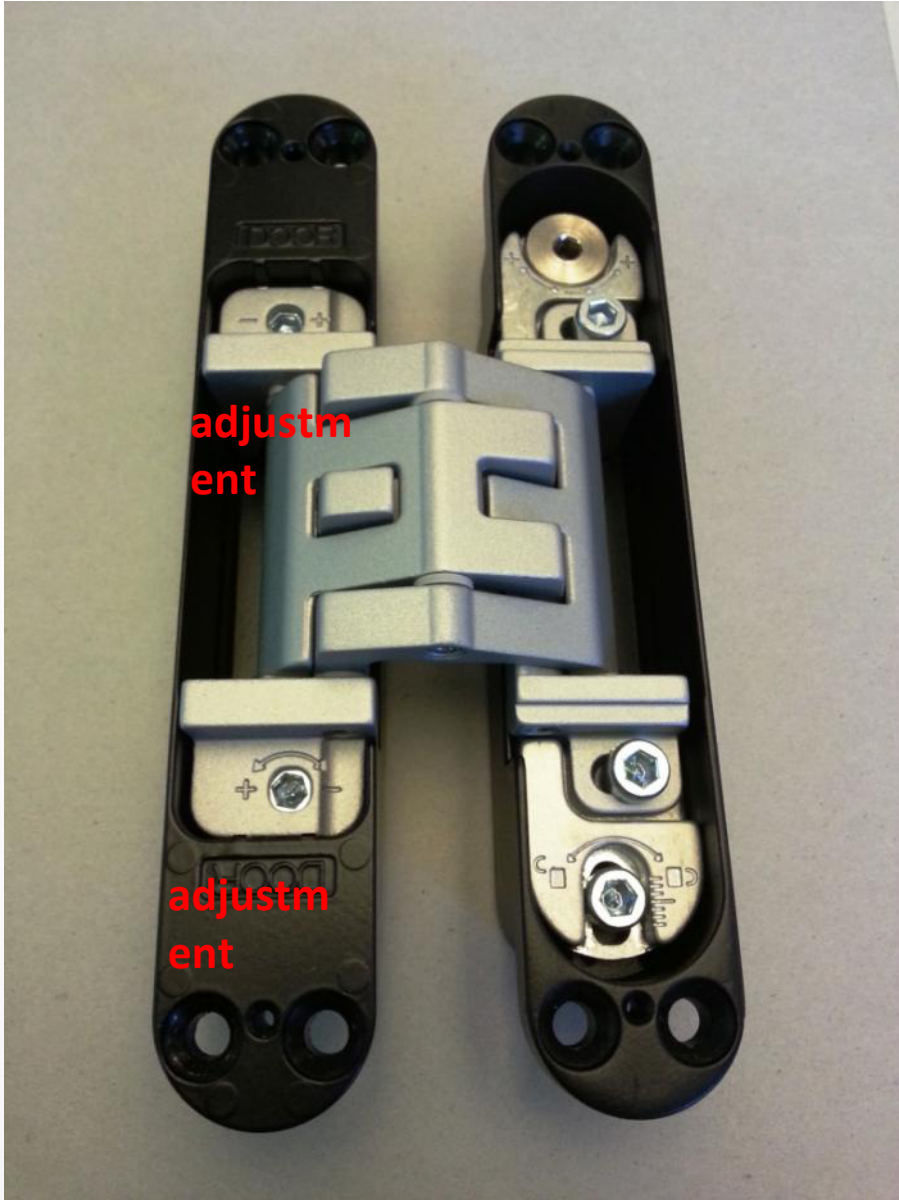

±3mm

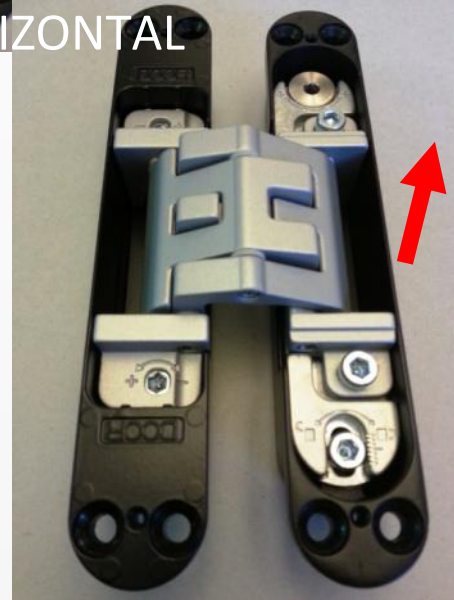





# K5080 – adjustment

Allen key no.4

KRONA KOBLENZ

2 adjustment

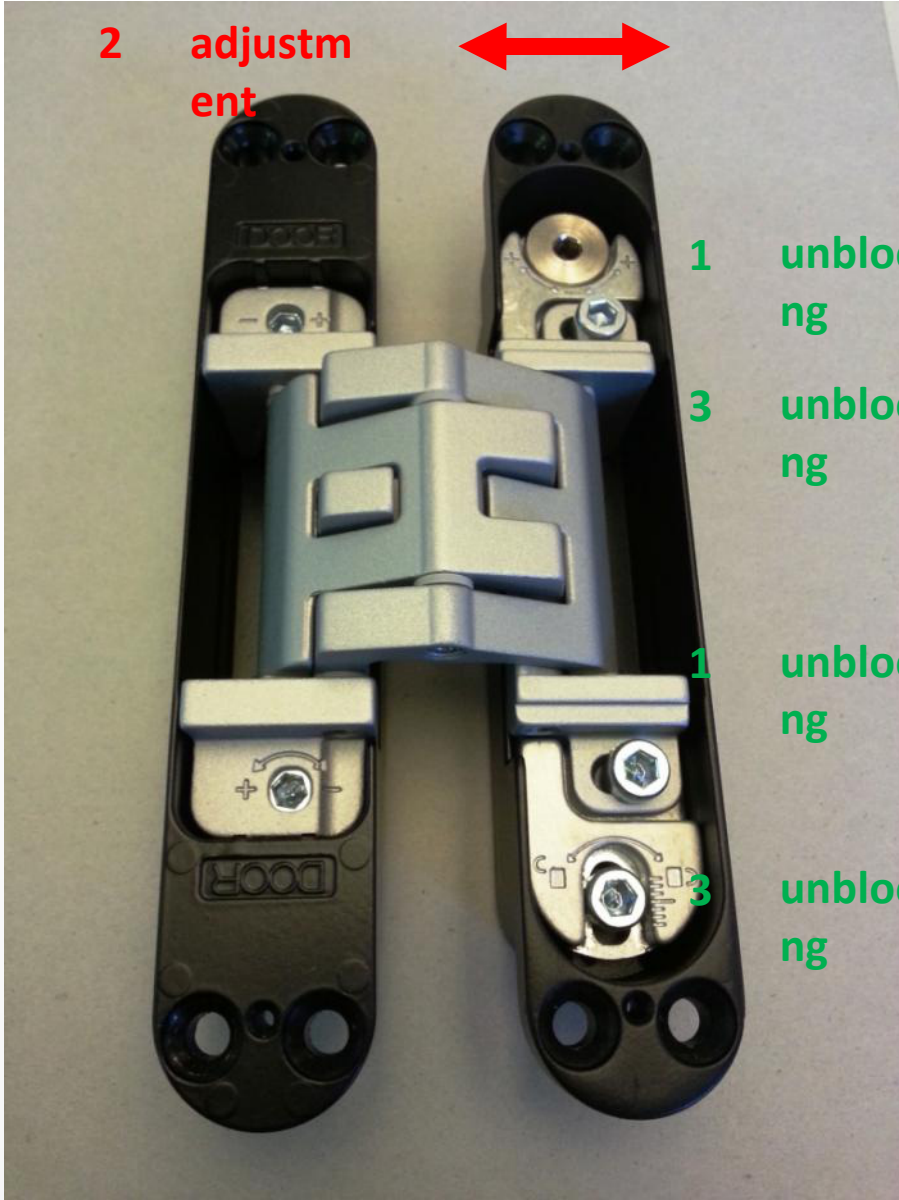


1 unblocking

3 unblocking


1 unblocking

3 unblocking

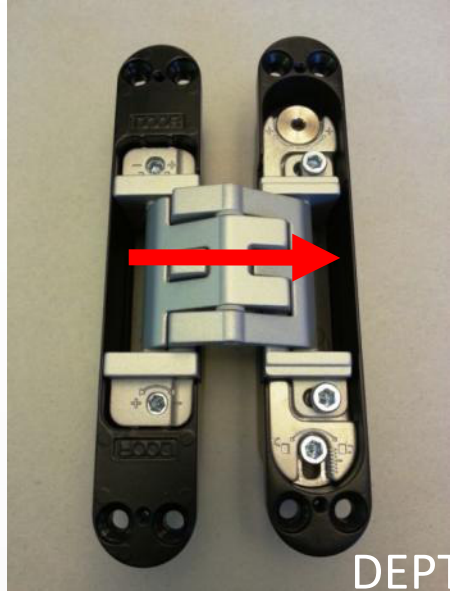



DEPTH

±1mm

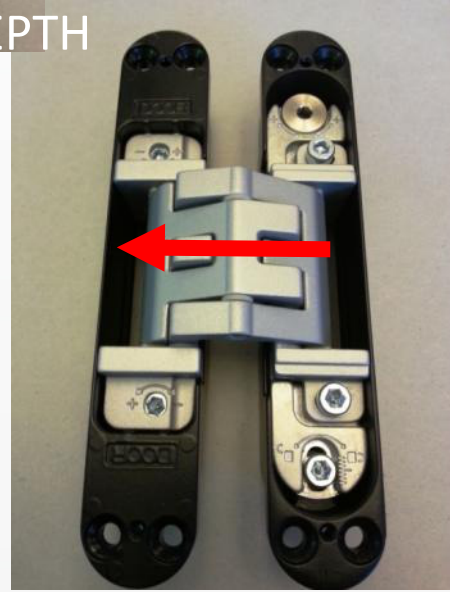



# K5080 – COVER FINISHING

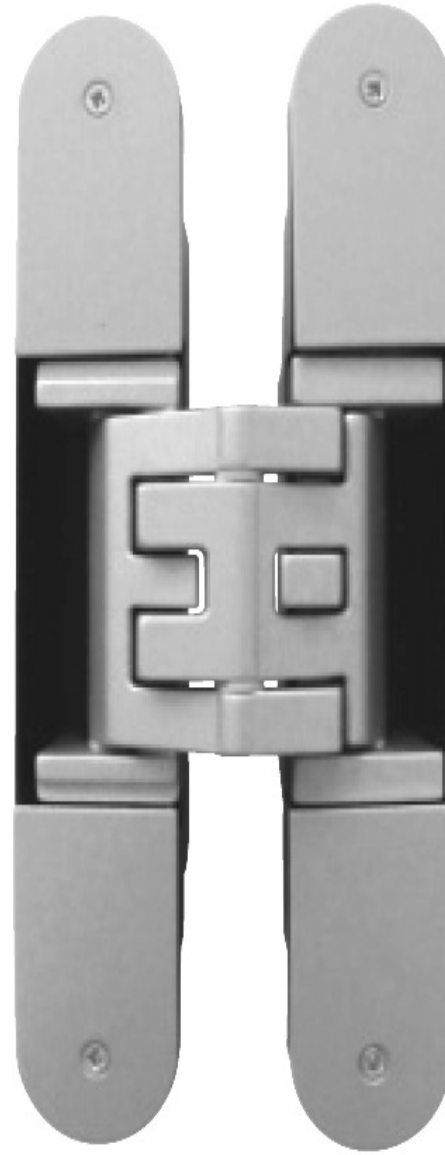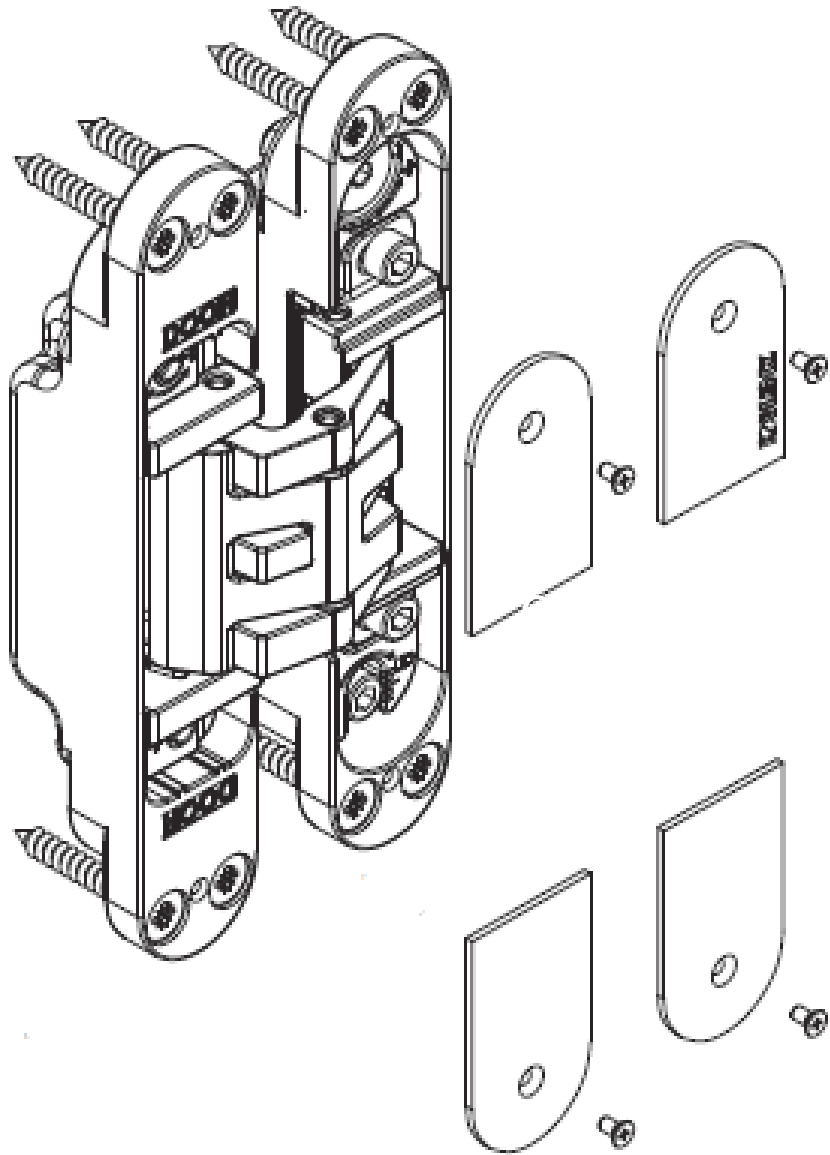

# K5080 – COVER FINISHING



The relative hole for the fixing screw of the cover IS NOT threaded

The screw is self-threading while entering its zama base